


Retractable Motorized Screen

Outside Mount Measuring Guide

Use these instructions to measure your opening for an **outside mount motorized** screen. Supply the final width and final height when ordering.

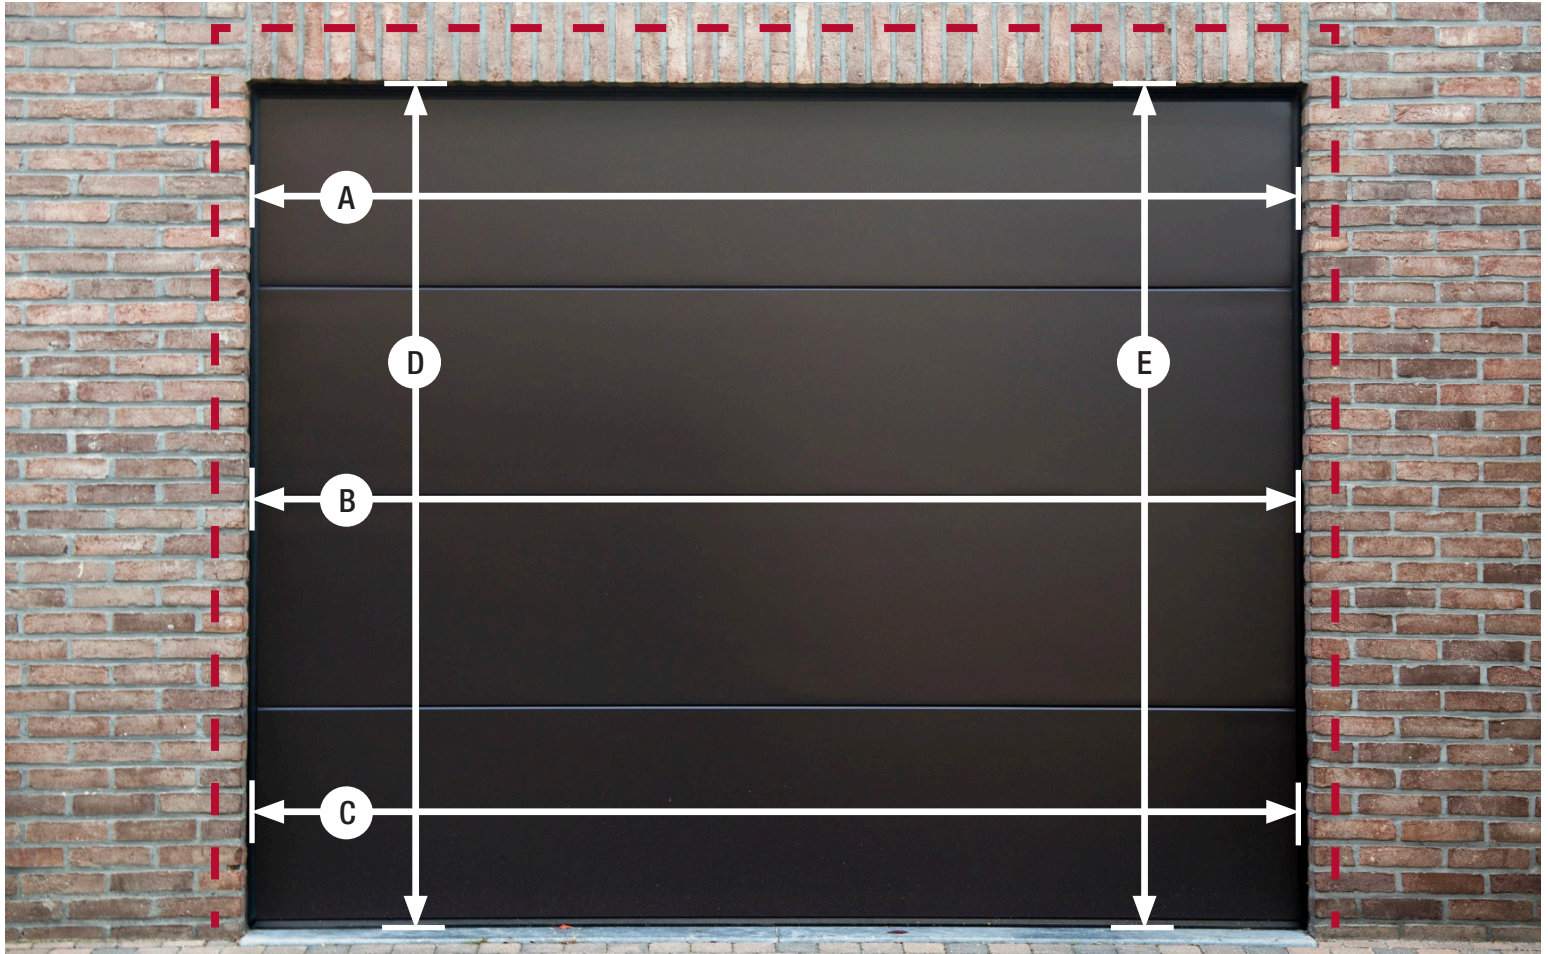

Measure distances A, B and C in inches and record below. Take the widest measurement and **add 5 inches**: This is your final width.

Note: This will allow for the screen to be outside mounted and without infringing on the daylight opening.

| | | | | | | | |
|---|-------|---|-------|---|-------|-------------|--|
| A | Width | B | Width | C | Width | Final Width | |
|---|-------|---|-------|---|-------|-------------|--|

Measure distances D and E in inches and record below. Take the highest measurement and **add 10 inches**: This is your final height.

Note: This will allow for the housing and bottom bar to rest above the opening and without infringing on the daylight opening. If there is a header, ceiling or other obstruction above the opening, you can add less than 10 inches to create the final height. However, this will cause the screen to infringe on the daylight opening.

| | | | | | |
|---|--------|---|--------|--------------|--|
| D | Height | E | Height | Final Height | |
|---|--------|---|--------|--------------|--|