


Sierra 800 SCREENS

MEASURING GUIDE



MEASURING FOR THE NET SCREEN OPENING DIMENSIONS

Begin by deciding where best to position the screen. The opening must be plumb, level and square. Make any needed adjustments to the opening (or plan and allow for shimming) before measuring for the screen. Manufacturing tolerances are plus or minus 1/16". Because of this we recommend that you deduct an additional 1/16" in the width and height dimensions that you submit in order to assure that the screen is not too tight in the opening during installation. Determine the "NET SCREEN OPENING DIMENSION" (width x height) as measured from where the outside most edges of the retractable screen will rest. Screens are then made to fit these dimensions. Manufacturing tolerances are plus or minus 1/16". We recommend that with inside the frame installations (option A) that you deduct an additional 1/16" in the width and height dimensions that you submit in order to assure that the screen is not too tight in the opening during installation.

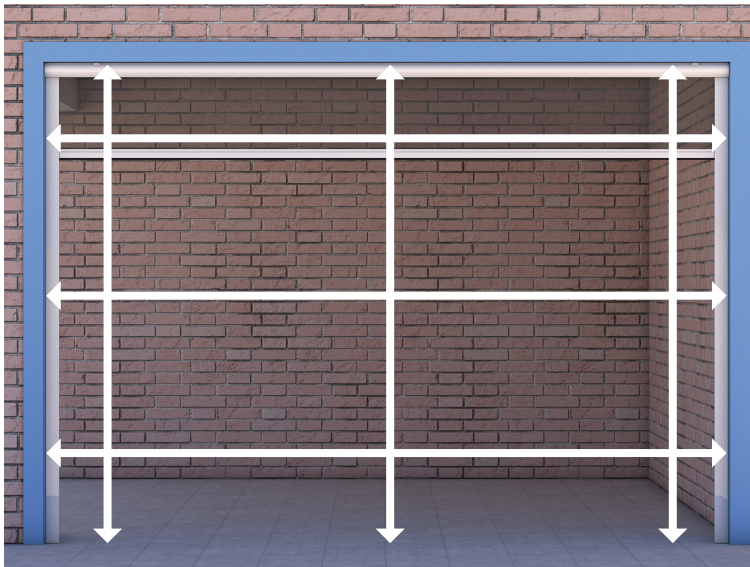

COMMON INSTALLATIONS

- ☐ **OPTION A** Inside the Frame (Recess/Inset Mounted)
- ☐ **OPTION B** Outside the Frame (Surface/Face Mounted)


RECORD FINAL NET SCREEN OPENING DIMENSIONS

W _____

H _____

(If using installation option A, deduct 1/16" from the width and height to order).

OPTION A (Recommended) INSIDE THE FRAME INSTALLATION (Recess/Inset Mounted)

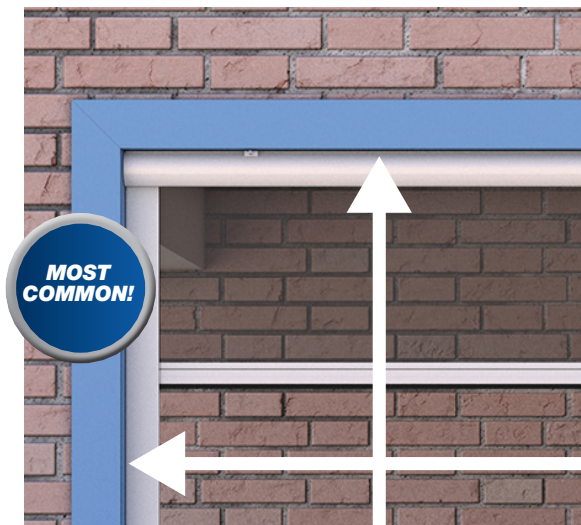

OPTION B OUTSIDE THE FRAME INSTALLATION (Surface/Face Mounted)

